



*North Atlantic Systems Planning Group
Aeronautical Communications Group*

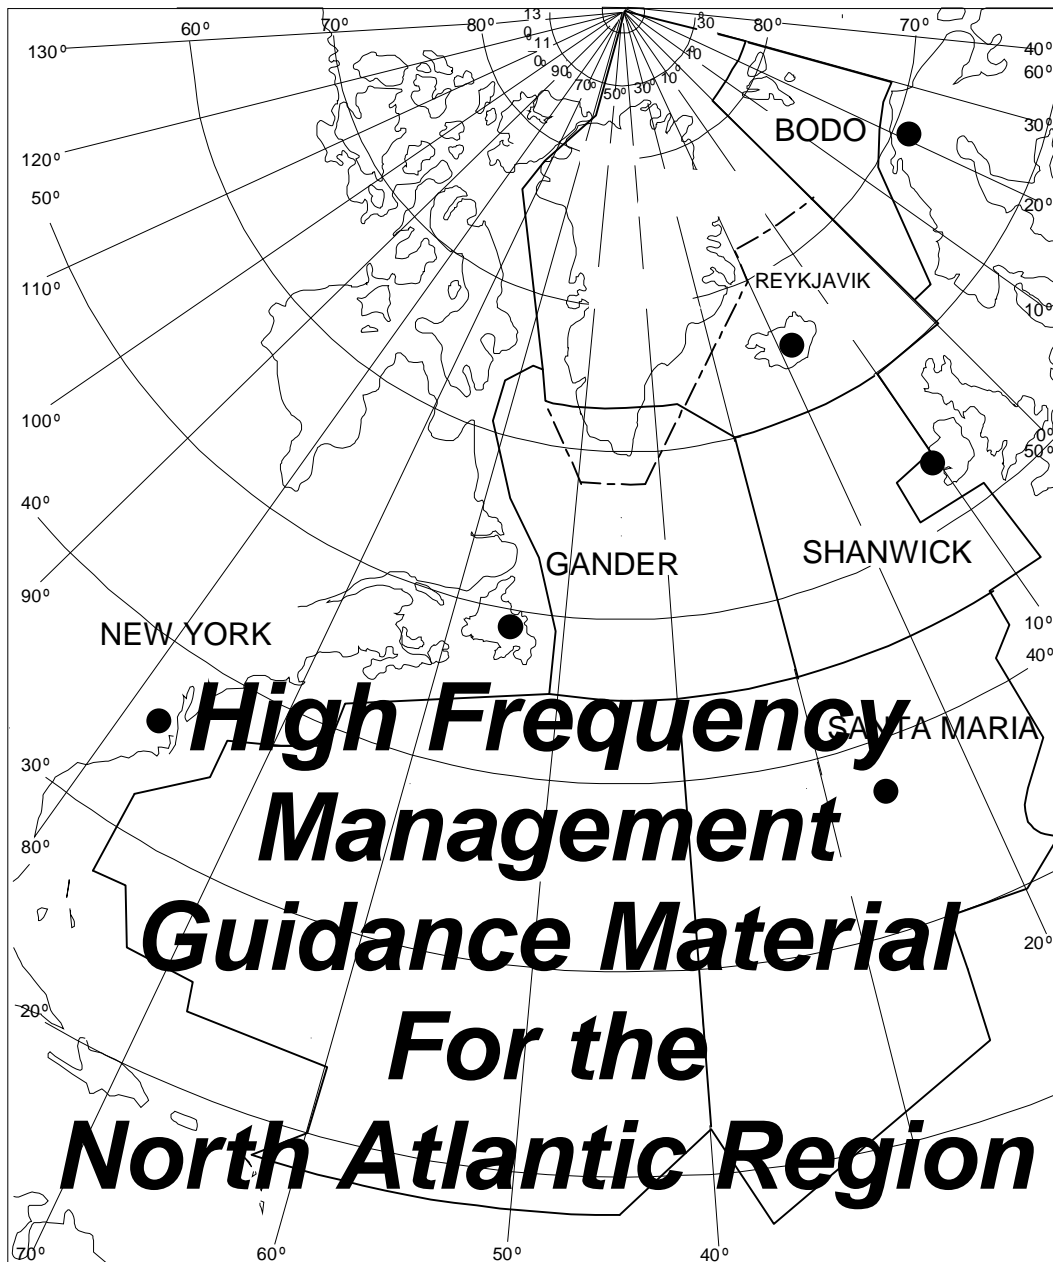

 <p>European and North Atlantic Office</p>	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 2

Document identification

Reference:	C:\Trabalho\ACSG\HF Frequency Management Guidance Material.doc
Title:	HF Management Guidance Material
Edited by:	ACG
Editor:	Jose Joaquim Cabral
Date:	30 September 2003
Published by:	NATSPG
Contact:	<p>Núcleo de Procedimentos e Padrões Operacionais do Atlântico (POPATL) Aeroporto de Santa Maria 9580 Vila do Porto Phone: +351 296820510 Fax: +351 296820552 Email: jcabral@nav.pt</p>
Obs:	

Table of Contents

DOCUMENT IDENTIFICATION	0
TABLE OF CONTENTS.....	0
CHANGE RECORD	0
PREFACE.....	0
LIST OF ACRONYMS.....	0
1 INTRODUCTION.....	0
1.1 PURPOSE OF THE DOCUMENT	0
2 OPERATIONAL CONCEPT	0
2.1 OVERVIEW	0
2.2 HF MEDIUM CHARACTERISTICS	0
2.3 RADIOTELEPHONY NETWORK	0
2.3.1 DEFINITION.....	0
2.3.2 NAT RADIOTELEPHONY NETWORK COMPOSITION.....	0
2.3.3 PRINCIPLES OF NETWORK OPERATION	0
2.3.4 FREQUENCIES TO BE USED	0
2.3.5 ESTABLISHMENT OF COMMUNICATIONS	0
2.3.6 TRANSFER OF COMMUNICATIONS	0
2.3.7 COMMUNICATIONS FAILURE	0
2.4 SELCAL OPERATION	0
3 NAT FAMILIES AND FREQUENCIES ALLOTMENT PLAN.....	0
3.1 FREQUENCY ALLOTMENT PLAN FOR THE AERONAUTICAL MOBILE SERVICE (AMS).....	0
3.1.2 MAJOR WORLD AIR ROUTE AREA – NORTH ATLANTIC (MWARA - NAT).....	0
3.1.3 MWARA – NAT FREQUENCIES	0
3.1.4 NAT FAMILIES	0
3.1.5 NAT SUB-NETWORKS	0
4 NAT FAMILIES AND FREQUENCIES ALLOCATION PRINCIPLES.....	0
4.1 GENERAL PRINCIPLES.....	0
4.2 FAMILY ALLOCATION PRINCIPLES.....	0
4.2.1 FAMILY A OR SUB-NETWORK A	0
4.2.2 FAMILY B AND C OR SUB-NETWORKS B AND C	0
4.2.3 FAMILY D OR SUB-NETWORK D.....	0
4.2.4 FAMILY E OR SUB-NETWORK E	0
4.2.5 FAMILY F OR SUB-NETWORK F.....	0
4.3 FREQUENCY ALLOCATION PRINCIPLES	0
5 GENERAL NOTES.....	0
5.1 HOURS OF SERVICE.....	0
5.2 POINTS OF CONTACT	0
5.3 COORDINATION PRINCIPLES	0



HF Management Guidance Material


- APPENDIX A - HF MEDIUM CHARACTERISTICS 0**
- APPENDIX B-1 - BODO RADIO STATION INFORMATION..... 0**
- APPENDIX B-2 - GANDER RADIO STATION INFORMATION 0**
- APPENDIX B-3 - ICELAND RADIO STATION INFORMATION..... 0**
- APPENDIX B-4 - NEW YORK RADIO STATION INFORMATION 0**
- APPENDIX B-5 - SANTA MARIA RADIO STATION INFORMATION..... 0**
- APPENDIX B-6 - SHANWICK RADIO STATION INFORMATION..... 0**
- APPENDIX C-1 - BODO RADIO STATION FREQUENCIES HOURS OF SERVICE 0**
- APPENDIX C-2 - GANDER RADIO STATION FREQUENCIES HOURS OF SERVICE..... 0**
- APPENDIX C-3 - ICELAND RADIO STATION FREQUENCIES HOURS OF SERVICE 0**
- APPENDIX C-4 - NEW YORK RADIO STATION FREQUENCIES HOURS OF SERVICE..... 0**
- APPENDIX C-5 - SANTA MARIA RADIO STATION FREQUENCIES HOURS OF SERVICE..... 0**
- APPENDIX C-6 - SHANWICK RADIO STATION FREQUENCIES HOURS OF SERVICE..... 0**

Change Record

This chart provides records of changes to Version 0.1 and forward.

	Paragraph(s)	Explanation
Version 0.2	1.1.3	Deleted, re-numbering paragraphs from 1.1.4 through 1.1.9
	1.1.3	New numbering, paragraph redrafted
	1.1.4	New numbering, paragraph redrafted
	1.1.7	New numbering, paragraph redrafted
	1.1.8	New numbering, paragraph redrafted
Version 0.3	List of Acronyms	New entries added
	Section 3	New section added
Version 0.4	Table of contents	Updated
	List of Acronyms	New entries added
	Section 4	New section added
	Section 5	New section added
	Annexes	New section added
Version 0.5	All document	Change KHz to kHz
	Section 1	Redrafted paragraphs 1.1.1, 1.1.2, 1.1.3, 1.1.4, 1.1.6, 1.1.7, 1.2.1, and 1.2.2
	Section 2	Redrafted paragraphs 2.1.2, 2.1.3, 2.1.4, 2.1.5, 2.3.1.1, 2.3.2.1, 2.3.2.2, 2.3.2.3, 2.3.2.4, 2.5.2.1, 2.5.2.2, 2.5.2.3, and 2.5.4.1. Removed references to Annex 10 in 2.3.3, 2.3.4, 2.3.5, 2.3.6, 2.3.7, and 2.4. Removed 2.5.2.3
	Section 3	Redrafted paragraphs 3.1.3.1, 3.1.4.1, 3.1.4.2, 3.1.4.3, 3.1.5.1, 3.2.1, 3.2.2.4.1, 3.2.2.5.1 and 3.2.2.5.2.
	Section 4	Redrafted paragraphs 4.1.1, 4.1.4, 4.1.5, 4.1.6, 4.1.7, 4.2.1.1, 4.2.1.2, 4.2.1.3, 4.2.2.1, 4.2.2.2, 4.2.2.3, 4.2.3.1, 4.2.3.2, 4.2.3.3, 4.2.4.1, 4.2.4.2, 4.2.4.3, 4.2.5.1, 4.2.5.2, 4.2.6.1, 4.2.6.2, 4.2.6.3, 4.3.1, 4.3.2, 4.3.3 and 4.3.4. New paragraphs 4.2.2.4, 4.2.3.4 and 4.3.5


	Paragraph(s)	Explanation
	Section 5	Redrafted paragraphs 5.1.2, 5.2.1, 5.3.1, 5.3.2 and 5.4.1
	Annexes	Updated
Version 0.6	Table of contents	Update. Removed references to VOLMET
	Section 1	Removed references to VOLMET on 1.2.2
	Section 2	Review 2.2, correction on 2.3.2.2, removed references to VOLMET on 2.2.4 – Table 1, delete 2.5
	Section 3	Correction on 3.1.5.1, delete 3.2
	Section 4	Redrafted 4.2.2. Deleted 4.2.3. Renumbering of 4.2.3 to 4.2.6
	Section 5	Reviewed 5.1, 5.2, and 5.3, delete 5.4.
	Appendixes	Renamed to Appendixes. New section format. New Appendix A. Delete old Annexes 7, 8 and 9 related to VOLMET Broadcast Plan.
Version 1	Header	Renamed ACSG to ACG
	Preface	Renamed ACSG to ACG
	List of Acronyms	Renamed ACSG to ACG
	Section 5	Insert new 5.4 and 5.4.1 regarding Poor HF propagation conditions
	Appendixes	Changes on Appendixes B-1 to 6, inclusion of SATCOM numbers on all stations, address information on Gander Information, several changes on Bodo Station as proposed. Changes on Appendix C-5, hours of operation to Santa Maria Station as it will be publish on State AIP after the evaluation trials. Renamed ACSG to ACG.

	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 7

Preface


This Document is published by the North Atlantic Systems Planning Group, and managed by the Aeronautical Communications Group, and is for guidance. Regulatory material relating to North Atlantic communications procedures is contained in relevant ICAO Documents and Annexes. Annex 10 – Volume II, ITU Radio Regulations, Regional Supplementary Procedures (Doc. 7030), FASID, NAT OPS Manual, State AIP and current NOTAM's, which should be read in conjunction with the guidance material contained in this document.

To assist with the editing of this document and to ensure the currency and accuracy of future editions, comments and suggestions for possible amendments should be sent to the editor, to the contact information included in the document identification section.


 European and North Atlantic Office	<h1>HF Management Guidance Material</h1>		
	30/09/03	NATSPG	ACG

List of Acronyms

ACARS	Aircraft Communication Addressing and Reporting System
ACC	Area Control Centre
ACG	Aeronautical Communications Group
ACID	Aircraft Identification
AIP	Aeronautical Information Publication
AFTN	Aeronautical Fixed Telecommunication Network
AMS	Aeronautical Mobile Service
ARINC	Aeronautical Radio INC.
ARP	Air Report Message
ATC	Air Traffic Control
ATM	Air Traffic Management
ATN	Aeronautical Telecommunication Network
ATS	Air Traffic Services
ATSMP	Air Traffic Services Message Processor
ATSU	Air Traffic Services Unit
CAA	Civil Aviation Authority
CNS	Communications, Navigation and Surveillance
EMG	Emergency Message
FAP	Frequency Allotment Plan
FDPS	Flight Data Processing System
FIR	Flight Information Region
FMC	Flight Management Computer
FMS	Flight Management System
GP	General Purpose
GPS	Global Positioning System
HF	High Frequency (3 to 30 MHz)
ICAO	International Civil Aviation Organization
ICD	Interface Control Document
ITU	International Telecommunications Union
LDOC	Long Distance Operations Control
kHz	Kilohertz
LF	Low Frequency (30 to 300 kHz)
LUF	Lowest Usable Frequency
MET	Meteorological
MF	Medium Frequency (300 to 3000 kHz)
MHz	Megahertz
MUF	Maximum Usable Frequency
MWAR	Major World Air Route
MWARA	Major World Air Route Area
NAT	North Atlantic
NAT SPG	North Atlantic Systems Planning Group
NOTAM	Notice to Airmen
OCA	Oceanic Control Area
POS	ICAO Position Report Message
RDAR	Regional and Domestic Air Routes

 European and North Atlantic Office	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 9


RDARA	Regional and Domestic Air Route Area
R/T	Radio-Telephony
SARPS	Standards and Recommended Practices
SELCAL	Selective Calling System
VHF	Very High Frequency (30 to 300 MHz)
VLF	Very Low Frequency (3 to 30 kHz)
WP	Waypoint Position
WPR	Waypoint Position Reporting

	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 10

1 Introduction

1.1 *Purpose of the document*

- 1.1.1 The purpose of this document is to provide a guidance methodology for the utilisation of the Families and Frequencies employed by the Aeronautical Communication Stations on the North Atlantic, to support a better management plan of the available families, frequencies and human resources, in order to increase the efficiency and capacity of the Communications Network.
- 1.1.2 It will also include information about HF frequencies for air-ground communications. In addition, it will contain contact information for Aeronautical Stations.

 <p>European and North Atlantic Office</p>	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 11

2 Operational concept

2.1 Overview

- 2.1.1 The Aeronautical Mobile Service is a service reserved for air-ground communications related with the safety and regularity of flights, flying primarily along national or international civil air routes.
- 2.1.2 In areas like the North Atlantic, where VHF coverage is insufficient due to range limitation to cover all portions of the routes flown, the use of HF frequencies are necessary because they provide long range communications coverage, not only for air-ground voice communications, but also for the broadcast of ATS or Meteo information.
- 2.1.3 For various reasons, some technical, others economical, environmental, physical, natural, etc., coverage of a wide area by a single station with equipment located in a single place are impractical.
- 2.1.4 Taking these factors into account, the most practical option is to employ a number of stations sharing a range of frequencies and working as a network to provide the facilities and services required for the AMS.
- 2.1.5 To work as a network the AMS should follow appropriate principles of operation, in order to achieve the highest possible level of capacity and efficiency, otherwise, its purpose will not be achieved and the safety and regularity of flights will be affected.

2.2 HF medium characteristics

- 2.2.1 This section presents only a short description on the HF medium characteristics, a more detail description can be found in Appendix A.
- 2.2.2 As a general rule, radio signals travel in straight lines, that is, they follow great circle paths over the surface of the earth. Under certain circumstances, however, the path of a signal may change direction, this change of direction is called refraction. Refraction examples are coastal, atmospheric and ionospheric, and the amount of refraction varies considerably, depending on certain conditions. Those conditions could be a change in direction when a signal crosses a coastline (coastal refraction), a change in direction due to a variation in temperature, pressure and humidity, particularly at low altitude (atmospheric refraction), or a change in direction when the radio wave passes through an ionised layer (ionospheric refraction).
- 2.2.3 The ionosphere is still under investigation but it is known that several definite ionised layers exist within it. During daytime hours there are four main ionisation layers designated D, E, F₁ and F₂ in ascending order of height. At night, when the sun's radiation is absent, ionisation still persists but it is less intense, and fewer layers are found (D and F layers). Factors that affect the ionosphere layers is strength of the sun's radiation, since it varies with latitude causing that the structure of the ionosphere varies widely over the earth's surface, and the state of the sun, since sunspots affect the amount of ultra-violet radiation.

2.2.3.1 Maximum Usable Frequency (MUF) at night is much less than by day, because the intensity of ionisation in the layer is less so than lower frequencies have to be used to produce the same amount of refractive bending and give the same critical angle and skip distance as by day. However, the signal attenuation in the ionosphere is also much less at night so the lower frequency needed is still usable. Hence the night frequency for a given path is about half of the day frequency, and shorter distances can be worked at night than by day while still using a single reflection from the F layer.

2.2.3.2 The MUF not only varies with path length and between day and night, but also with season, meteor trails, sunspot state, and sudden ionospheric disturbances produced by eruptions on the sun. Because of the variations of MUF, HF transmitting stations have to use frequencies varying widely between about 2 and 20 MHz.

2.2.4 As consequence of this conditions, frequency band usage can be viewed in the following table:

Areas	Bands between: (MHz)	Sharing conditions
MWARA area	3 and 6.6	Night propagation
	9 and 11.3	Day propagation
	Higher than 13	Day propagation

Table 1 – Frequency band usage (ref. ITU Appendix 27 Aer2)

2.3 Radiotelephony Network


2.3.1 Definition

2.3.1.1 A radiotelephony network is defined as a group of radiotelephony aeronautical stations which operate on and guard frequencies from the same family and which support each other in a defined manner to ensure maximum dependability of air-ground communications and dissemination of air-ground traffic

2.3.2 NAT Radiotelephony Network Composition

2.3.2.1 In the NAT there are six aeronautical stations, one per each of the Oceanic FIR's, responsible for the provision of air-ground communications as part of the Aeronautical Mobile Service. They are: Bodo Radio (Norway, Bodo ACC), Gander Radio (Canada, Gander OACC), Iceland Radio (Iceland, Reykjavik ACC), New York Radio (USA, New York OACC), Santa Maria Radio (Portugal, Santa Maria OACC) and Shanwick Radio (Ireland, Shanwick OACC).

2.3.2.2 In addition to those six aeronautical stations, there are two other stations that operate NAT frequencies. They are Canarias Radio which serves Canarias ACC and Arctic Radio serving Edmonton, Winnipeg and Montreal ACC's.

	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 13

2.3.2.3 To support the air-ground communications of the AMS in the NAT, twenty-four frequencies were allocated by the ITU (Appendix 27 Aer2), in different bands to ensure NAT MWARA, continuous coverage.

2.3.2.4 All NAT HF frequencies are organized into six groups known as Families, The families are identified as NAT Family A, B, C, D, E and F. Each Family contains a range of frequencies from each of the HF frequency bands allocated to the Network.

2.3.3 Principles of Network Operation

2.3.3.1 The aeronautical stations of a radiotelephony network should assist each other in order to provide the air-ground communication service required of the network by aircraft flying on the air routes for which the network is responsible.

2.3.3.2 When the network comprises a large number of stations, network communications for flights on any individual route segment should be provided by selected stations, termed “regular stations” for that segment. In principle, the regular station will be those serving the locations immediately concerned with flights on that route segment, i.e. points of take-off and landing and appropriate flight information centres or area control centres.

2.3.3.3 In areas or on routes where radio conditions, length of flights or distance between aeronautical stations require additional measures to ensure continuity of air-ground communications throughout the route segment, the regular stations should share between them a responsibility of primary guard whereby each station will provide the primary guard for that portion of the flight during which the messages from the aircraft can be handled most effectively by that station.

2.3.3.4 During its tenure of primary guard, each regular station should, among other things:


- a) be responsible for designating suitable primary and secondary frequencies for its communications with the aircraft;
- b) receive all position reports and handle other messages from and to the aircraft essential to the safe conduct of the flight;
- c) be responsible for the action required in case of failure of communication.

2.3.4 Frequencies to be used

2.3.4.1 Aircraft stations shall operate on the appropriate radio frequencies.

2.3.4.2 The air-ground radio station shall designate the frequency(ies) to be used under normal conditions by aircraft stations operating under its control.

2.3.4.3 In network operation, the initial designation of primary and secondary frequencies should be made by the network station with which the aircraft makes pre-flight check or its initial contact after take-off. This station should also ensure that other network stations are advised, as required, of the frequency(ies) designated.

 <p>European and North Atlantic Office</p>	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 14


- 2.3.4.4 An aeronautical station when designating frequencies, should take into account the appropriate propagation data and distance over which communications are required .
- 2.3.4.5 If a frequency designated by an aeronautical station proves to be unsuitable, the aircraft station should suggest an alternative frequency.

2.3.5 Establishment of communications

- 2.3.5.1 Aircraft stations shall, if possible, communicate directly with the air-ground control radio station appropriate to the area in which the aircraft are flying. If unable to do so, aircraft stations shall use any relay means available and appropriate to transmit messages to the air-ground control radio station.
- 2.3.5.2 When normal communications from an aeronautical station to an aircraft station cannot be established, the aeronautical station shall use any relay means available and appropriate to transmit messages to the aircraft station. If this efforts fail, the originator shall be advised.
- 2.3.5.3 When, in network operation, communication between an aircraft station and a regular station has not been established after calls on the primary and secondary frequencies, aid should be rendered by one of the other regular stations for that flight, either by calling the attention of the station first called or, in case of a call made by an aircraft station, by answering the call and taking the traffic.
- 2.3.5.4 Other stations of the network should render assistance by taking similar action only if attempts to establish communication by the regular stations have proved unsuccessful.

2.3.6 Transfer of communications

- 2.3.6.1 The transfer of primary guard from one station to the next will normally take place at the time of the traversing of flight information region or control area boundaries, this guard being provided at any time, as far as possible, by the station serving the flight information centre or area control centre in whose area the aircraft is flying.
- 2.3.6.2 An aircraft station should be advised by the appropriate aeronautical station to transfer from one radio frequency or network to another. In the absence of such advice, the aircraft station should notify the appropriate aeronautical station before such transfer takes place.
- 2.3.6.3 In the case of transfer from one network to another, the transfer should preferably take place while the aircraft is in communication with a station operating in both networks to ensure continuity of communications. If, however, the change of network must take place concurrently with the transfer of communication to another network station, the transfer should be co-ordinated by the two network stations prior to advising or authorizing the frequency change. The aircraft should also be advised of the primary and secondary frequencies to be used after the transfer.

 <p>European and North Atlantic Office</p>	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 15

2.3.7 Communications failure

2.3.7.1 When an aircraft station fails to establish contact with the aeronautical station on the designated frequency, it shall attempt to establish contact on another frequency appropriate to the route. If this attempt fails, the aircraft station shall attempt to establish communication with other aircraft or other aeronautical stations on frequencies appropriate to the route. In addition, an aircraft operating within a network shall monitor the appropriate VHF frequency for calls from nearby aircraft.

2.3.7.2 When an aeronautical station has been unable to establish contact with an aircraft station after calls on the frequencies on which the aircraft is believed to be listening, it shall:

- a) Request other aeronautical stations to render assistance by calling the aircraft and relaying traffic, if necessary;
- b) Request aircraft on the route to attempt to establish communication with the aircraft and relay traffic, if necessary.

2.3.7.3 The air-ground control radio station shall notify the appropriate air traffic services unit and the aircraft operating agency, as soon as possible, of any failure in air-ground communications.

2.4 SELCAL operation

2.4.1 With the selective calling system known as SELCAL, the voice call is replaced by the transmission of coded tones to the aircraft over the radiotelephony channels. A single selective call consists of a combination of four pre-selected audio tones whose transmission requires approximately two seconds. The tones are generated in the aeronautical station coder and are received by a decoder connected to the audio output of the airborne receiver. Receipt of the assigned tone code activates a cockpit call system in the form of light and/or chime signals.

3 NAT Families and Frequencies Allotment Plan

3.1 Frequency Allotment Plan for the Aeronautical Mobile Service (AMS)

3.1.1 The frequencies allocated for use in the NAT, are based on the Frequency Allotment Plan, for the MWARA - NAT as defined on the “Appendix 27 Aer2 to the Radio Regulations – Frequency Allotment Plan for the Aeronautical Mobile (R) Service and Related Information”.

3.1.2 Major World Air Route Area – North Atlantic (MWARA - NAT)

3.1.2.1 The MWARA - NAT is an area defined as the area from the North Pole through the points 60N135W, 49N120W, 49N074W, 39N078W, 18N066W, 05N055W, 16N026W, 32N008W, 44n002E, 60N020E, to the North Pole, and can be viewed on Figure 3 (Ref. ITU Appendix 27 Aer2).

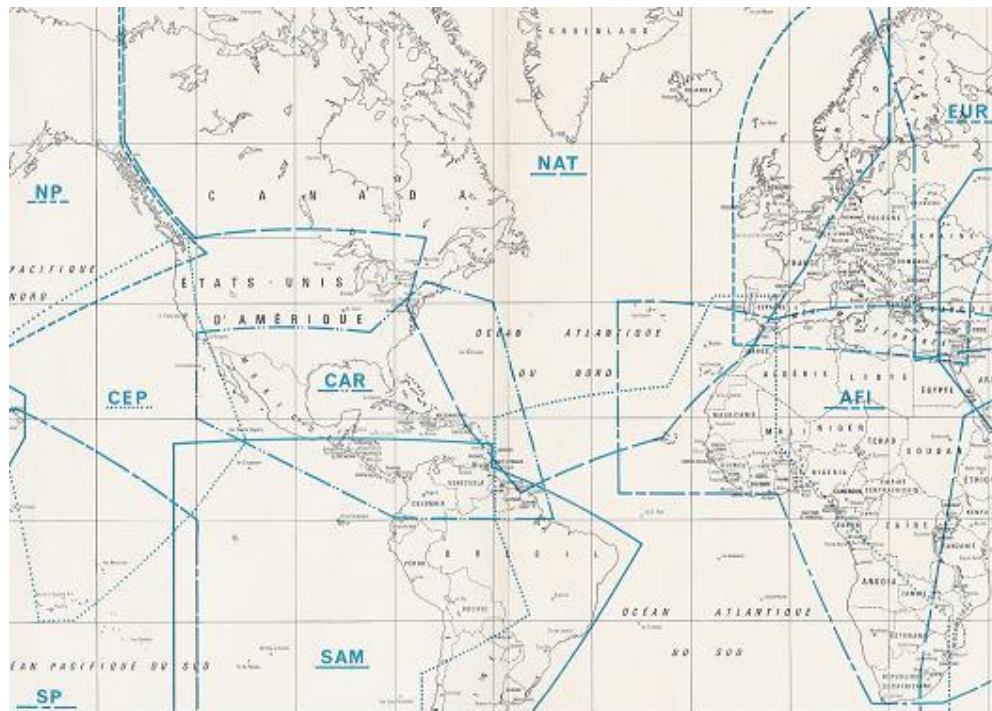


Figure 1 – MWARA – NAT (Ref. ITU Appendix 27 Aer2)

3.1.3 MWARA – NAT Frequencies

3.1.3.1 The frequencies allocated to the MWARA – NAT includes a number of frequencies in a range of bands designed to provide twenty-four hour area coverage and are contained in Table 2.

Area	Frequency Bands								
	3 kHz	3.5 kHz	4.7 kHz	5.6 kHz	6.6 kHz	9 kHz	11.3 kHz	13.3 kHz	18 kHz
NAT	2872	3476	4675	5598	6622	8825	11279	13291	17946
	2899			5616	6628	8831	11309	13306	
	2962			5649	8864	11336	13354*		
	2971			8879					
	3016			8891	8906				

* Frequency shared with RDARA 5 and 7

Table 2 – Frequency bands of FAP for the MWARA – NAT
(Ref. ITU Appendix 27 Aer2)

3.1.4 NAT Families

- 3.1.4.1 The NAT Families were defined utilising the frequencies allocated for the purpose of providing an AMS throughout the coverage area required.
- 3.1.4.2 Each Family comprises a range of frequencies drawn from each frequency band and selected in such a way as to provide, to the extent possible, continuous service in the area of responsibility at all times of day and under varying propagation conditions.
- 3.1.4.3 The organisation of the NAT HF Families and corresponding frequencies are contained in Table 3.

NAT Family	Frequencies
A	3016, 5598, 8906, 13306 and 17946 kHz
B	2899, 5616, 8864, 13291 and 17946 kHz
C	2872, 5649, 8879, 11336, 13306 and 17946 kHz
D	2971, 4675, 8891, 11279, 13291 and 17946 kHz
E	2962, 6628, 8825, 11309, 13354 and 17946 kHz
F	3476, 6622, 8831, 13291 and 17946 kHz

Frequency 13306 kHz is shared between Families A and C
 Frequency 13291 kHz is shared between Families, B, D and F
 Frequency 17946 kHz is shared by all the Families
 Frequency 13354 kHz is shared with RDARA 5 and 7


Table 3 – NAT families and frequencies

3.1.5 NAT Sub-networks

- 3.1.5.1 Based on the definition of a radiotelephony network as described in paragraph 2.3.1.1 above, the NAT Radiotelephony Network comprises six sub-networks, one per each of the NAT Families. These sub-networks are described in Table 4.

NAT Family	Sub-network	Stations
A	A	Gander Radio New York Radio Santa Maria Radio Shanwick Radio
B	B	Gander Radio Iceland Radio Shanwick Radio
C	C	Gander Radio Iceland Radio Shanwick Radio
D	D	Bodo Radio Gander Radio Iceland Radio Shanwick Radio Arctic Radio (*)
E	E	Canarias Radio (**) New York Radio Santa Maria Radio
F	F	Gander Radio Shanwick Radio
(*) Arctic Radio is not a NAT Station. (**) Canarias Radio is not a NAT Station. Included as interface between NAT and AFI		

Table 4 – NAT Sub-networks

	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 19

4 NAT Families and Frequencies Allocation Principles


4.1 General principles

- 4.1.1 In accordance with the principles of network operation, as described in paragraph 2.3.3, the frequencies assigned to an aircraft should belong to the same sub-network, which includes all the stations that may be affected by the aircraft flight route.
- 4.1.2 The frequency assignment should always take into account the propagation conditions, route of flight, distance from station, possible affected stations and even distribution over network frequencies, especially during peak periods.
- 4.1.3 Frequency assignment should, whenever possible, be done in such a way that radio stations could take advantage of all the available operational frequencies, and thereby avoid or shorten the delay time usually associated with the current system.
- 4.1.4 Frequencies should be guarded only during the periods when they are usable, as described in paragraph 2.2, instead of maintaining the current twenty-four hour watch practice.
- 4.1.5 During off-peak periods, when it is unnecessary to guard all frequencies and families, radio stations should use common families to achieve more efficient use of staff resources.
- 4.1.6 There should be regular tactical co-ordination of network resources between sub-network stations to meet changing operational requirements.
- 4.1.7 Stations experiencing peak demand should, following co-ordination with other network stations, be facilitated in sharing available network frequencies.

4.2 Family allocation principles

4.2.1 Family A or Sub-network A

- 4.2.1.1 This family should, whenever possible, be assigned to aircraft whose route or portion of route transits Gander, New York, Santa Maria and Shanwick areas, especially those aircraft flying routes with reporting point coordinates between 43N and 47N.
- 4.2.1.2 Stations should not assign Family A to aircraft flying routes outside the area defined in 4.2.1.1, due to overloading of other families or for other operational reasons, without prior co-ordination with and agreement of other sub-network stations in order to minimise adverse impact on existing sub-network traffic.
- 4.2.1.3 During off peak periods, and when watch is reduced on other families, Family A should remain the primary assignment for aircraft flying southerly routes.

	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 20

4.2.2 Family B and C or Sub-networks B and C

- 4.2.2.1 This Family should, whenever possible, be assigned to aircraft flying on eastbound or westbound tracks whose route or portion of route lies within the Gander, Iceland and Shanwick areas, particularly aircraft flying routes with reporting point coordinates between 47N and 64N.
- 4.2.2.2 Stations should not assigned Family B and C to aircraft flying routes outside the area defined in 4.2.2.1, due to overloading of other families or for other operational reasons, without prior co-ordination with and agreement of the other sub-network stations in order to minimise adverse impact on existing sub-network traffic.
- 4.2.2.3 At all times Family B and C should remain the primary assignment for aircraft flying central routes.
- 4.2.2.4 In order to ensure even peak-time distribution of traffic between Family B and C, aircraft may be assigned to either family on the basis of; state of registry, Airline Company or other such criteria as agreed between Shanwick Radio and Gander Radio.

4.2.3 Family D or Sub-network D

- 4.2.3.1 This Family should, whenever possible, be assigned to aircraft whose route or portion of route lies within the Bodo, Gander, Iceland and Shanwick areas, particularly those aircraft flying routes with reporting point coordinates north of 62N.
- 4.2.3.2 Stations should not assign Family D to aircraft flying routes outside the area defined in 4.2.3.1, due to overloading of other families or for other operational reasons, without prior co-ordination with and agreement of other sub-network stations in order to minimise adverse impact on existing sub-network traffic.
- 4.2.3.3 During off peak periods, and when watch is reduced on other families, Family D should remain the primary assignment for aircraft flying northerly routes.

4.2.4 Family E or Sub-network E

- 4.2.4.1 This Family should, whenever possible, be assigned to aircraft whose route or portion of route transits New York and Santa Maria areas, especially those aircraft flying routes with reporting point coordinates south of 43N.
- 4.2.4.2 Stations should not assign Family E to aircraft flying routes outside the area defined in 4.2.4.1, due to overloading of other families or for other operational reasons, without prior co-ordination with and agreement of other sub-network stations in order to minimise adverse impact on existing sub-network traffic.
- 4.2.4.3 During off peak periods, and in the case of reduction of the number of available families, the guard of this family should be discontinued.

4.2.5 Family F or Sub-network F

- 4.2.5.1 This Family should, whenever possible, be assigned to aircraft flying routes entirely within the Gander and Shanwick areas.
- 4.2.5.2 Stations should not assign Family F to aircraft flying routes outside the area defined in 4.2.5.1, due to overloading of other families or for other operational reasons, without prior co-ordination with and agreement of other sub-network stations in order to minimise adverse impact on existing sub-network traffic.
- 4.2.5.3 Hours of operation of Family F shall be co-ordinated on a tactical basis between Shanwick Radio and Gander Radio.

4.3 Frequency allocation principles

- 4.3.1 Taking into account the characteristics of the HF medium, the general principles for frequency assignment used by radio station personnel is as outlined in 2.2.4 and contained in Table 7.

Bands between: (MHz)	Sharing conditions
3 and 6.6	Night propagation
9 and 11.3	Day propagation
Higher than 13	Day propagation

Table 7 – General principles for frequency assignment

- 4.3.2 As a general rule, when assigning primary and secondary frequencies, radio station personnel should assign lower frequencies as primary and higher frequencies as secondary for aircraft flying away from the Station. Conversely, for aircraft routing towards the station, the higher frequencies should be assigned as primary and lower frequencies as secondary.
- 4.3.3 In circumstances where sunspot or solar flare activity is expected to affect propagation conditions, the radio station personnel should always inform the flight crews and in addition to assigning the primary and secondary frequencies, they should advise the highest frequencies in use at the station as a precautionary measure.
- 4.3.4 In accordance with the principles governing transfer of communications as defined in paragraph 2.3.6, stations sharing a common boundary should, whenever possible, assign common frequencies for the transfer of communications.
- 4.3.5 Aircraft routing along common boundaries, or flying a route or portion of a route within 60 NM of a common boundary, should be assigned frequencies common to the stations sharing those boundaries.

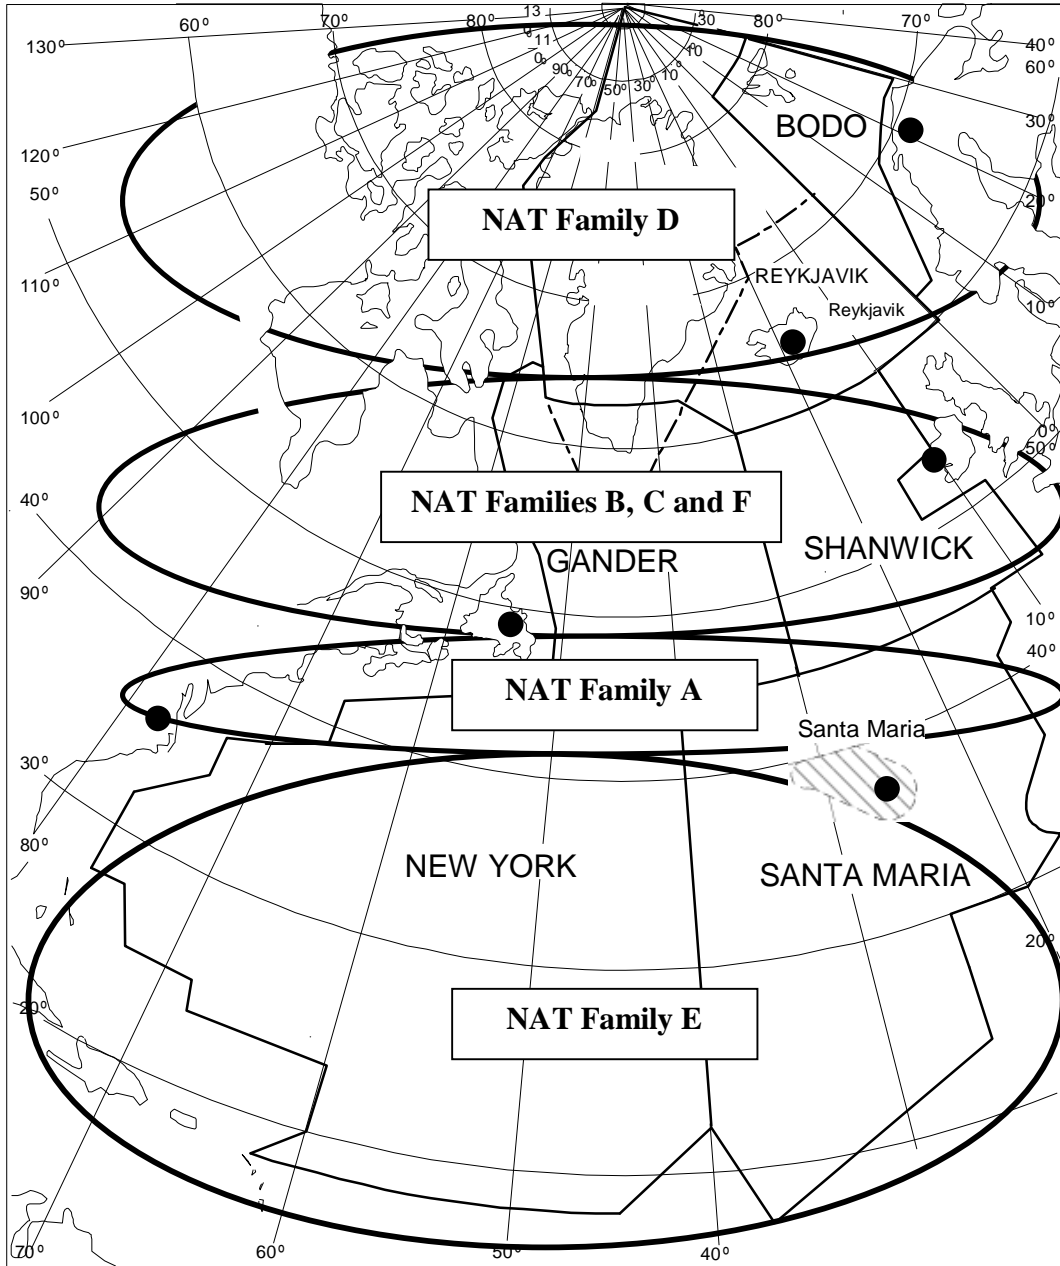



Figure 3 – NAT Family usage areas

 <p>European and North Atlantic Office</p>	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 23

5 General notes

5.1 Hours of service

- 5.1.1 Each station should define the frequencies hours of service, taking into account the general principles defined on paragraph 4.1.
- 5.1.2 The defined hours of service will be published and updated in the Annexes to this document, and can be viewed in Appendix C-1 (Bodo), Appendix C-2 (Gander), Appendix C-3 (Iceland), Appendix C-4 (New York), Appendix C-5 (Santa Maria) and Appendix C-6 (Shanwick).

5.2 Points of contact


- 5.2.1 Contact details of the station managers and watch supervisors for each radio station are contained in the Annexes section as follows: Appendix B-1 (Bodo), Appendix B-2 (Gander), Appendix B-3 (Iceland), Appendix B-4 (New York), Appendix B-5 (Santa Maria) and Appendix B-6 (Shanwick).

5.3 Coordination principles


- 5.3.1 For routine day-to-day operations such as inter-station tactical co-ordination of frequency and family assignments, network co-operation and support, etc., contact should be made with the duty supervisor/watch manager using the contact means specified in Appendixes B-1, 2, 3, 4, 5 and 6.
- 5.3.2 When the coordination between stations involves subjects such as procedures, institutional issues, or issues affecting the Network as a whole, etc., the contact to the station or stations should be made to the station manager through the points of contact defined in Appendixes B-1, 2, 3, 4, 5 and 6.

5.4 Poor HF propagation conditions

- 5.4.1 Whenever a radio station duty supervisor/watch manager have access to information or warnings regarding poor HF propagation conditions or high levels of solar activities, that will affect the normal HF operations, he should notify the on duty Supervisor of the ATC unit in which the station provide the service.


 European and North Atlantic Office	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 24

Appendices

 <p>European and North Atlantic Office</p>	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 25

Appendix A - HF medium characteristics

- 1.1 The term frequency is used to state the number of cycles occurring in one second, taking into account that cycle means a complete oscillation of the alternating current. The distance travelled by a radio signal during the transmission of one cycle is called wavelength. Wavelength is inversely proportional to frequency, so that if frequency is increased the wavelength will decrease.
- 1.2 If an alternating current of suitably high frequency is fed to a transmitting aerial, the energy is not confined to the metal of the aerial but radiates out into space in the form of electromagnetic waves (radio waves). This radiation of energy through space comprises alternating and magnetic fields at right angles to each other.
- 1.3 As a general rule, radio signals travel in straight lines, that is, they follow great circle paths over the surface of the earth. Under certain circumstances, however, the path of a signal may change direction, this change of direction is called refraction. Refraction examples are coastal, atmospheric and ionospheric, and the amount of refraction varies considerably, depending on certain conditions. Those conditions could be a change in direction when a signal crosses a coastline (coastal refraction), a change in direction due to a variation in temperature, pressure and humidity, particularly at low altitude (atmospheric refraction), or a change in direction when the radio wave passes through an ionised layer (ionospheric refraction).
- 1.4 The path of a radio wave from a transmitter to a receiver many miles away is not necessarily direct, and in many cases, the signal may be reaching the receiver by more than one path at the same time. Because of the different path lengths there will be phase differences between the signals, and this fact will affect the resultant signal strength, phenomenon known as fading.
- 1.5 The main propagation paths between a transmitter and a receiver are, direct wave, ground-reflected wave, space wave, surface wave, ground wave and sky wave.
 - 1.5.1 When a signal travels in a straight line between the transmitter and receiver it is called direct wave and its use is limited because of the earth curvature. If the radio wave arrive to the receiver after reflection at the earth's surface it is called ground-reflected wave. These two waves are jointly known as the space wave and under normal conditions it's the only propagation path for frequencies above 30 Mhz.
 - 1.5.2 When a signal follows the curvature of the earth, this path is called surface wave, and is normally caused by a phenomenon called diffraction. Diffraction occurs for all types of wave motion, and allows the wave to pass round earth obstacles and depends on the wavelength in relation to the radius of the earth. The range of surface wave depends on the wavelengths, with longer wavelengths (lower frequencies) the diffraction effect becomes more pronounced with consequently improved surface wave range, the type of surface, because different surfaces absorb different amounts of radio energy resulting in different rates of attenuation, being higher over land than over sea, and the frequency used, with lower frequencies suffering less attenuation along the surface and therefore providing better surface wave range.

 <p>European and North Atlantic Office</p>	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 26

- 1.5.3 The combination of direct, ground-reflected and surface waves can be described has the ground wave. However, not all of those types of waves have to be necessarily present together.
- 1.5.4 When signals are reflected or refracted down from ionised layers above the earth the path is called sky waves, also sometimes called ionosphere waves.
- 1.6 Ultra-violet light from the sun can cause electrons to become separated from their parent atoms of the gases in the atmosphere. The atoms are left with resultant positive charges and are then known as ions. The intensity of the ionisation depends on the strength of the ultra-violet radiation and the density of the air. The part of the atmosphere in which this process occurs is called the ionosphere, extending from about 50 Km to as high as 500 Km above the earth's surface. When a radio wave enters such a layer, refraction occurs causing the wave to be bent away from its straight path. The amount of refraction depends on the frequency, the angle at which the wave enters the layer, and the intensity of ionisation.
- 1.7 The ionosphere is still under investigation but is known that several definite ionised layers exist within it. During daytime hours there are four main ionisation layers designated D, E, F₁ and F₂ in ascending order of height. At night, when the sun's radiation is absent, ionisation still persists but it is less intense, and fewer layers are found (D and F layers). Factors that affect the ionosphere layers is strength of the sun's radiation, since it varies with latitude causing that the structure of the ionosphere varies widely over the earth's surface, and the state of the sun, since sunspots affect the amount of ultra-violet radiation.
- 1.7.1 The D layer is only significant during daylight hours, dispersing soon after sunset. It is the lowest layer and its intensity of ionisation is not great, in which VLF waves are reflected from the base of the layer, LF and MF waves enter the layer and are severely attenuated without being appreciably refracted, and higher frequency signals pass through the layer with less attenuation.
- 1.7.2 The E layer is strong ionised by day and remains weakly ionised by night, producing strong sky waves in the LF and MF bands by night, but during the daytime due to the attenuation caused by the D layer the sky waves produced are too weak to used in these bands. Usable HF sky waves may be produced by this layer during nigh and day, and VHF signals usually pass through this layer, and if refraction exist it is insufficient to generate sky waves, unless under "freak" conditions, duct (or super-refraction) and scatter (or sporadic-E reflections) propagation. Ionospheric refraction is negligible with UHF, SHF and EHF signals and sky waves do not occur in these bands.
- 1.7.3 The F layer is the highest and more intensely ionised layer. At night there is only one F layer, but during the daytime is divided into two layers, the F₁ and F₂. Strong sky waves are produced in the LF, MF and HF bands at night but only the HF band has usable F layer sky waves by day. Signals in the VHF and higher bands escape through the F layer into space with, normally, no sky waves produced.
- 1.8 Sky wave propagation in the HF band (3 to 30 MHz) is complicated, because there are many variable factors, which decide whether or not there is a propagation path open between transmitter and receiver for long-range radiotelephony.

- 1.8.1 For a given frequency and state of the ionosphere, the amount of refractive “bending” of the wave will depend on the angle at which the wave penetrates the layer. Waves travelling nearly vertically may escape through a layer, but may be returned to earth if a higher more intensely ionised layer exists.

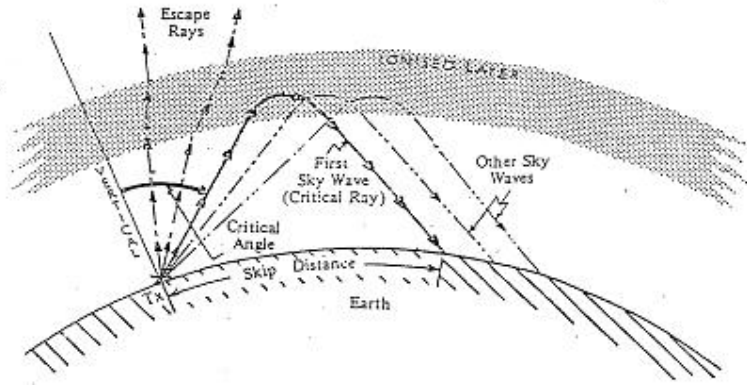


Figure 4 – Critical angle (HF band)

- 1.8.2 As can be seen on Figure 1, waves ascending with an increased angle with the vertical, the amount of bending is greater and when the angle with the vertical is increased to the critical angle, the path is bent enough for the wave to return to earth as the first sky wave. Waves making an angle with the vertical greater than the critical angle will also produce sky waves, coming down to earth at greater ranges than that of the first sky wave. The range from the transmitter and the first sky wave for a given frequency and set of conditions is called the skip distance. If the surface wave from a HF transmitter become completely attenuated at a shorter range than that at which the first sky wave returns to earth, leaves an area in which neither ground wave nor sky waves are received and which is none as dead space (Figure 2).

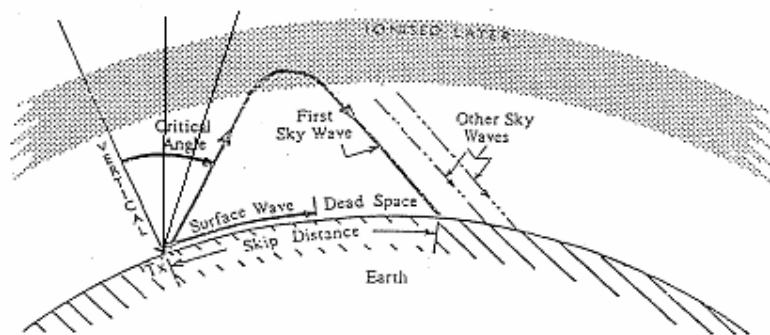




Figure 5 – Dead space (HF band)


	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 28

- 1.8.3 Critical angle depends largely on the frequency, the higher the frequency the greater the critical angle, therefore, if skip distance is to be reduced, a lower frequency has to be used. This is most significant when choosing the optimum frequencies for HF communications and ensuring that the skip distance is less than the range of the distant receiver.
- 1.8.4 For good long-range HF R/T reception a frequency must be chosen which will not suffer too much attenuation. If a relatively high frequency is used, for example 29 MHz, most of the energy will pass through the E layer and be reflected from the more intensely ionised F layer. The higher the frequency, the greater degree of ionisation is required to give reflection. As frequency is reduced and attenuation of the E layer reflections increases, a limit is reached called the “Lowest Usable Frequency (LUF)”, and below this frequency the attenuation is too great for the signal to be usable.
- 1.8.5 Thus for least attenuation, and so the highest received signal strength for a given transmitter power, a frequency is chosen which is as high as possible without exceeding the MUF (Maximum Usable Frequency) for the path between the transmitter and distant receiver. The MUF is that frequency, for the prevailing conditions, which produces a skip zone extending just short of the distant receiver. Any higher frequency would give a higher critical angle and a greater skip distance exceeding beyond the receiver, which would then lose that sky wave contact with the transmitter.
- 1.8.6 MUF at night is much less than by day, because the intensity of ionisation in the layer is less so than lower frequencies have to be used to produce the same amount of refractive bending and give the same critical angle and skip distance as by day. However, the signal attenuation in the ionosphere is also much less at night so the lower frequency needed is still usable. Hence the night frequency for a given path is about half of the day frequency, and shorter distances can be worked at night than by day while still using a single reflection from the F layer.
- 1.8.7 The MUF not only varies with path length and between day and night, but also with season, meteor trails, sunspot state, and sudden ionospheric disturbances produced by eruptions on the sun. Because of the variations of MUF, HF transmitting stations have to use frequencies varying widely between about 2 and 20 MHz.
- 1.9 The theoretical range for HF frequencies varies, depending on the propagation path used, ground or sky waves. Ground waves usually can reach up to 100 nm and sky waves longer distances, however, sky waves will not be received within the skip distance (probably several hundred miles from the transmitter). The theoretical maximum range obtained by means of a single reflection from the E layer is about 1 300 nm, and from the F layer about 2 500 nm. This theoretical maximum range is achieved with the transmitted signal leaving the earth’s surface tangentially. Ranges of 8 000 nm or more may be achieved by means of multiple reflections, mainly from the F layer, being the signal alternately refracted down from the layer and reflected up again from the earth’s surface until it becomes too weak to use.

 European and North Atlantic Office	<h1 style="margin: 0;">HF Management Guidance Material</h1>		
	30/09/03	NATSPG	ACG


Appendix B-1 - BODO Radio Station Information

Station Name:		Bodo Radio							
Country: Norway				State: Nordland					
City: Bodo				Geographic Location: 67°16'09N014°21'55E					
AFTN Address: ENBOYSYX				Aircraft in Flight Address: ENBOZZZX					
SATCOM SHORT CODE Nr. : 425702									
Facilities									
Transmitter site(s)					Receiver site(s)				
Location and equipment:					Location and equipment:				
Bodo 67°16'N 014°21'E 1 Marconi H1141 (10 kW) 1 Harris RF-765A (5 kW)					Bodo 67°16'N 014°21'E 6 Rhode & Schwarz EK895/896				
Andoya 69°10'N 015°50'E 1 Harris RF-765A (5 kW)					Andoya 69°10'N 015°50'E 4 Rhode & Schwarz EK896				
<i>Berlevaag 70°50'N 029°E (1 Marconi H1141 mk2 (10 kW)) (expected operational late 2003)</i>					<i>(North Cape 71N 025.30E) (X Rhode & Schwarz EK896) (expected operational late 2003)</i>				
Class of Emission: USB/AM					SELCAL: 2 Baumberger selcal-coder				
Frequencies									
Family	Frequency bands								
	3 MHz	3.5 MHz	4.7 MHz	5.6 MHz	6.6 MHz	9 MHz	11.3 MHz	13.3 MHz	18 MHz
D	2971		4675			8891	11279		
1C	2983		4666		6544	8840			
SAR		3023		5680					
Station Manager *					Supervisor				
Name: Ole Petter Nordnes					Name: Leiv Torbjorn Herseth				
Post Address: AVINOR N-8041 BODO					Post Address: AVINOR N-8041 BODO				
Phone: + 47 75543050					Phone: + 47 75543057				
Fax: + 47 75543010					Fax: + 47 75542943				
Email: ole.petter.nordnes@lv.no					Email: leiv.torbjorn.herseth@avinor.no				
AFTN/SITA Address: ENBOYFYX					AFTN/SITA Address: ENBOYFYX				
Remarks: Bodo HF radio is collocated and is a department within Bodo ATCC. * Chief Controller Bodo ATCC									

 European and North Atlantic Office	HF Management Guidance Material		
	30/09/03	NATSPG	ACG


Appendix B-2 - GANDER Radio Station Information

Station Name:		Gander Radio							
Country: Canada					State: Newfoundland				
City: Gander					Geog. Location: 48°57'58.5N054°35'50.7W				
AFTN Address: CYQXYSYX					Aircraft in Flight Address: CYQXZZZX				
SATCOM SHORT CODE Nr. : 431613									
Facilities									
Transmitter site					Receiver site				
Location: 48°58'95N054°40'28W					Location: 48°57'54N054°33'42W				
Equipment					Equipment				
22 Harris RF727 (5 KW) 4 Aerocom 1330 (5 KW) 18 tuned ¼ wave dipole main antennas Broadband backup antennas					22 Nardeux NC100 receivers Single vertical antenna utilizing a multi-coupler 4 Main vertical pole VOLMET antennas 4 Backup vertical pole VOLMET antennas				
Class of Emission: USB/AM					SELCAL: 10 Motorola Units				
Frequencies									
Family	Frequency bands								
	3 MHz	3.5 MHz	4.7 MHz	5.6 MHz	6.6 MHz	9 MHz	11.3 MHz	13.3 MHz	18 MHz
A	3016			5598		8906		13306	
B	2899			5616		8864		13291	
C	2872			5649		8879	11336	13306	
D	2971		4675			8891			
F		3476			6622	8831		13291	
VOLMET		3485			6604		10051	13270	
Station Manager					On Duty Supervisor				
Name: Bruce Hoddinott					Post Address:				
Post Address: NAV CANADA P.O Box 328 Gander, NL Canada, A1V 2R3					NAV CANADA P.O Box 328 Gander, NL Canada A1V 2R3				
Phone: + 1 709 651 5213					Phone: + 1 709 651 5212				
Fax: + 1 709 651 5235					Fax:				
Email: hoddinr@navcanada.ca					Email:				
AFTN/SITA Address: CYQXYSYX					AFTN/SITA Address: CYQXYSYX				
Remarks: Gander Radio is collocated within Gander OACC.									

 European and North Atlantic Office	HF Management Guidance Material		
	30/09/03	NATSPG	ACG


Appendix B-3 - ICELAND Radio Station Information

Station Name: Iceland Radio									
Country: Iceland	State:								
City: Reykjavik	Geographic Location: 64°08'53N 021°47'39W								
AFTN Address: BICCYSYX	Aircraft in Flight Address: BICCZZZX								
SATCOM SHORT CODE Nr. : 425105									
Facilities									
Transmitter site	Receiver site								
Location: 64°05'06N 021°50'43W	Location: 64°34'32N 022°08'46W								
Equipment	Equipment								
2 Aerocom 1330 (5KW) 2 JRC JRS 753 AM (5KW) 5 Marconi H1141 (10KW) 1 Andrews 3001 Omni-directional antenna 1 Andrews 747 log periodic antenna 2 TCI log periodic antennas 532 Dipole antennas	4 JRC NRD 95 receivers 15 JRC NRD 253 receivers 1 JRC NRD 302A receivers 5 TCI log periodic antennas 548, also access to Granger 2001 elliptically polarised antenna and Granger 3001 omni-directional antenna selectable through coax switches/multicouplers 3 JRC NRD 95 receivers as backup 1 JRC NRD 302A receivers as backup 1 T antennas as backup, also access to another T antenna.								
Class of Emission: SSB/AM (J3E/H3E)	SELCAL: 8 Motorola N1304A								
Frequencies									
Family	Frequency bands								
	3 MHz	3.5 MHz	4.7 MHz	5.6 MHz	6.6 MHz	9 MHz	11.3 MHz	13.3 MHz	18 MHz
B	2899			5616		8864		13291	
C	2872			5649		8879		13306	17946
D	2971		4675			8891	11279		
Station Manager					On Duty Supervisor				
Name: Reynir Eggertsson					Post Address: Iceland Telecom Ltd.				
Post Address: Iceland Telecom Ltd. Smárarimi 1 IS-112 Reykjavík Iceland					Smárarimi 1 IS-112 Reykjavík Iceland				
Phone: + 354 550 6539					Phone: + 354 553 3032				
Fax: + 354 567 5230					Fax: + 354 562 9043				
Email: reynireg@simi.is					Email: vardstj@simi.is				
AFTN/SITA Address: BICCYFYX					AFTN/SITA Address: BICCYFYX				
Remarks:									

 European and North Atlantic Office	HF Management Guidance Material		
	30/09/03	NATSPG	ACG


Appendix B-4 - NEW YORK Radio Station Information

Station Name:		New York Radio							
Country: United States of America					State: New York				
City: Bohemia, Long Island					Geographic Location: 40.46.79N0730572W				
AFTN Address: KNYCXAAG					Aircraft in Flight Address: KNYCZZX				
SATCOM SHORT CODE Nr. : 436623									
Facilities									
Transmitter site					Receiver site				
Location: Riverhead, (40.52.52N072.38.52W)					Location: SouthHampton (40.55.15N072.23.41W)				
Equipment					Equipment				
7 Cubic CTX-5000 (5 KW) 2 HF DL transmitters 3 Grainger log periodic antennas (2.8-32 MHz) 2 Grainger log periodic antennas (5.4-32 MHz) 2 Grainger log periodic antennas (6.5-32 MHz) 1 TCI log periodic antenna 2 Tuned dipole antennas (HF DL) 1 TCI omni-log periodic antenna (4-28 MHz) 1 Dipole for CAR-B 3455 MHz 1 Cubic Transmitter (1 KW) Standby					36 Cubic LCD2000 receivers 6 Aerocom 2215 receivers for LDOCF 2 HF DL receivers 3 Aerocom 2217 used only by maintenance 1 Log periodic north-east antenna 1 Log periodic south antenna 1 Omni directional antenna (Each antenna has a multi-couple for distribution of signals to the receivers)				
Class of Emission: 1K40H2B/2K80J3E					SELCAL: 14 Baker Units				
Frequencies									
Family	Frequency bands								
	3 MHz	3.5 MHz	5.6 MHz	6.6 MHz	9 MHz	11.3 MHz	13.3 MHz	18 MHz	22 MHz
A	3016		5598		8906		13306	17946	21964
E	2962			6628	8825	11309	13354	17952	
CAR A	2887		5550	6577	8846	11396	13297		
CAR B		3455	5520	6586	8918	11330		17907	
VOLMET		3485		6604		10051	13270		
LDOCF		3494		6640	8933	11342	13330	17925	
Station Manager					On Duty Supervisor				
Name: Peter Henschke					Post Address:				
Post Address:					New York Communications Center				
New York Communications Center					613 Johnson Ave				
613 Johnson Ave					Bohemia, Long Island, NY 11716-2696				
Bohemia, Long Island, NY 11716-2696					Phone: + 1 631 244 2480				
Phone: + 1 631 244 2480					Fax: + 1 631 563 2412				
Fax: + 1 631 563 2412					Email: nycradio@arinc.com				
Email: phenschk@arinc.com					AFTN/SITA Address: KNYCXGXA				
AFTN/SITA Address: KNYCXGXA									
Remarks: The communications control point is located at Bohemia, New York, and the transmitters are located at Riverhead, New York, on the east end of Long Island. The receivers are located at South Hampton, New York, also located on the east end of Long Island. New York radio is located less than 1 mile from New York ACC. Backup receiver located at New York radio; backup transmitters located less than 2 miles away at Islip Long Island Airport.									

 European and North Atlantic Office	HF Management Guidance Material		
	30/09/03	NATSPG	ACG

Appendix B-5 - SANTA MARIA Radio Station Information

Station Name:		Santa Maria Radio							
Country: Portugal				State: Santa Maria - Azores					
City: Vila do Porto				Geographic Location: 36°58'21N025°09'54W					
AFTN Address: LPAZYSYX				Aircraft in Flight Address: LPAZZZZX					
SATCOM SHORT CODE Nr. : 426305									
Facilities									
Transmitter site					Receiver site				
Location: Cabrestantes (36°59'44N025°10'14W)					Location: Faneca (36°59'44N025°07'48W)				
Equipment					Equipment				
10 INTECH 5000C (5KW) 3 Harris RF765-A (5 KW) backup TX 7 Andrews 1765 omni antennas 1 Andrews 2726 vertically log periodic antenna (west) 1 Andrews 747FCD horizontally log periodic antenna (north) 1 Delta antennas switch matrix					13 Harris R2368-A receivers 1 Hermes 24 loop array that allows 3 directional antennas (north, southeast and southwest) and 1 omni antenna (medium-long range) 1 Harris RF1976 omni antenna (short-medium range) 1 PG Electronics antennas switch matrix/multi coupler 1 Harris RF1956 omni antenna utilizing a multi coupler as backup				
Class of Emission: A3J/AM					SELCAL: 5 Motorola encoder 1304A				
Frequencies									
Family	Frequency bands								
	3 MHz	3.5 MHz	4.7 MHz	5.6 MHz	6.6 MHz	9 MHz	11.3 MHz	13.3 MHz	18 MHz
A	3016			5598		8906		13306	17946
E	2962				6628	8825	11309	13354	
Station Manager					On Duty Supervisor				
Name: Jose Cabral					Post Address: NAV PORTUGAL				
Post Address: NAV PORTUGAL					APARTADO 47				
APARTADO 47					AEROPORTO SANTA MARIA				
AEROPORTO SANTA MARIA					9580-909 VILA DO PORTO				
9580-909 VILA DO PORTO					Phone: + 351 296 820 423				
Phone: + 351 296 820 510					Fax: + 351 296 820 450				
Fax: + 351 296 820 552					Email: smaradio@nav.pt				
Email: jcabral@nav.pt					AFTN/SITA Address: LPAZYSYX				
AFTN/SITA Address: LPAZYFYA									
Remarks: Santa Maria radio is collocated and is a department within Santa Maria OACC Backup receiver site is also located in the vicinity of Santa Maria OACC									

 European and North Atlantic Office	HF Management Guidance Material		
	30/09/03	NATSPG	ACG

Appendix B-6 - SHANWICK Radio Station Information

Station Name: Shanwick Radio									
Country: Republic of Ireland	State: County Clare								
City: Shannon	Geographic Location: 52°47'N 008°55'W								
AFTN Address: EIAAYSYX	Aircraft in Flight Address: EIAAZZZX								
SATCOM SHORT CODE Nr. : 425002									
Facilities									
Transmitter site	Receiver site								
Location: Urlanmore (52°45'N 008°56'W)	Location: Ballygirreen (52°47'N 008°55'W)								
Equipment	Equipment								
14 SPT/Redifon 5KW 6 channel TX 2 Aerocomm 1330 5KW 6 channel TX 6 SPT/Redifon 5KW 6 channel TX Volmet 6 Omni-directional antennas 5 Vertical Log Periodic (directionally diverse) 2 Broadband Dipoles 2-13MHz 2 Cubic IKW 249 channel Data-link TX (In association with ARINC)	17 Philips Fixed channel Rx 7 Dansk Tuneable Rx 3 Horizontal Log Periodic Antennas 1 "T" Antenna 1 Rhombic Antenna 5 Antenna Multicouplers								
Class of Emission: J3E/H3E	SELCAL: Baumberger (12)								
Frequencies									
Family	Frequency bands								
	3 MHz	3.5 MHz	4.7 MHz	5.6 MHz	6.6 MHz	9 MHz	11.3 MHz	13.3 MHz	18 MHz
A	3016			5598		8906		13306	
B	2899			5616		8864		13291	
C	2872			5649		8879	11336	13306	
D	2971		4675			8891		13291	
F	3476				6622	8831		13291	
SAR	2182	3023		5680					
VOLMET		3413		5505		8957		13264	
Station Manager					On Duty Supervisor				
Name: Harry O'Loughlin					Post Address: Irish Aviation Authority, Shannon Aeradio, Ballygirreen Newmarket on Fergus, Co. Clare IRELAND.				
Post Address: Irish Aviation Authority Shannon Aeradio, Ballygirreen Newmarket on Fergus, Co. Clare IRELAND.					Phone: + 353 61 368241				
Phone: + 353 61 703803					Fax: + 353 61 472528				
Fax: + 353 61 703853					Email:				
Email: harry.oloughlin@iaa.ie					AFTN/SITA Address: EIAAYFYX				
AFTN/SITA Address: EIAAYTYX									
Remarks: By international agreement Shanwick Radio provides communications services for the Shanwick OCA. The associated OACC is located at Prestwick, Scotland, U.K.									



HF Management Guidance Material

30/09/03

NATSPG

ACG

Page 35

Appendix C-1 - BODO Radio Station Frequencies Hours of Service

<i>BODO</i> Radio Station																							
NAT Family	Frequency	Hours of Operation																					
		00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21
<i>NAT Family D</i>		X																					
	2971 kHz																						
	4675 kHz																						
	8891 kHz																						
	11279 kHz																						



30/09/03

HF Management Guidance Material

NATSPG

ACG

Page 36

Appendix C-2 - GANDER Radio Station Frequencies Hours of Service

		Gander Radio Station																							
		Hours of Operation																							
NAT Family	Frequency	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
<i>NAT Family A</i>		X																							
	3016 kHz				Ending 0830Z																			Starting 2030Z	
	5598 kHz																								
	8906 kHz									Starting 0830Z										Ending 2230Z					
	13306 kHz												Starting 1230Z			Ending 1830Z									
	17946 kHz																								
<i>NAT Family B</i>		X																							
	2899 kHz				Ending 0830Z																			Starting 2030Z	
	5616 kHz																								
	8864 kHz									Starting 0830Z										Ending 2230Z					
	13291 kHz																								
<i>NAT Family C</i>		X																							
	2872 kHz				Ending 0830Z																			Starting 2030Z	
	5649 kHz																								
	8879 kHz									Starting 0830Z										Ending 2230Z					
	11336 kHz											Starting 1030Z			Ending 1830Z										
<i>NAT Family D</i>		X																							
	2971 kHz				Ending 0830Z																			Starting 2030Z	
	4675 kHz																								
	8891 kHz									Starting 0830Z										Ending 2230Z					
	11279 kHz																								
<i>NAT Family F</i>		X																							
	3476 kHz				Ending 0830Z																			Starting 2030Z	
	6622 kHz																								
	8831 kHz									Starting 0830Z										Ending 2230Z					
	Hours of Operation as required																								



HF Management Guidance Material

30/09/03

NATSPG

ACG

Page 37

Appendix C-3 - ICELAND Radio Station Frequencies Hours of Service

<i>Iceland Radio Station</i>		Hours of Operation																							
NAT Family	Frequency	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
<i>NAT Family B</i>		X																							
	2899 kHz																								
	5616 kHz																								
	8864 kHz																								
	13291 kHz																								
	17946 kHz																								
<i>NAT Family C</i>		X																							
	2872 kHz																								
	5649 kHz																								
	8879 kHz																								
	13306 kHz																								
<i>NAT Family D</i>		X																							
	2971 kHz																								
	4675 kHz																								
	8891 kHz																								
	11279 kHz																								



HF Management Guidance Material

30/09/03

NATSPG

ACG

Page 38

Appendix C-4 - NEW YORK Radio Station Frequencies Hours of Service

<i>New York</i> Radio Station		Hours of Operation																							
NAT Family	Frequency	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
<i>NAT Family A</i>		X																							
	3016 kHz																								
	5598 kHz																								
	8906 kHz																								
	13306 kHz																								
	17946 kHz																								
<i>NAT Family E</i>		X																							
	2962 kHz																								
	6628 kHz																								
	8825 kHz																								
	11309 kHz																								
	13354 kHz																								



30/09/03

HF Management Guidance Material

NATSPG

ACG

Page 39

Appendix C-5 - SANTA MARIA Radio Station Frequencies Hours of Service

		<i>Santa Maria Radio Station</i>																							
		Hours of Operation																							
NAT Family	Frequency	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
<i>NAT Family A</i>		X																							
	3016 kHz																								
	5598 kHz																								
	8906 kHz																								
	13306 kHz																								
	17946 kHz																								
<i>NAT Family E</i>		X																							
	2962 kHz																								
	6628 kHz																								
	8825 kHz																								
	11309 kHz																								
	13354 kHz																								
<p>Note 1: Whenever required Santa Maria Radio Station will use the available frequencies outside the defined hours of operation.</p> <p>Note 2: On duty Supervisor will previously coordinate the new hours of frequency whenever required.</p>																									



HF Management Guidance Material

30/09/03


NATSPG

ACG

Page 40

Appendix C-6 - SHANWICK Radio Station Frequencies Hours of Service

		Shanwick Radio Station																							
NAT Family	Frequency	Hours of Operation																							
		00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
<i>NAT Family A</i>		X																							
	3016 kHz																								
	5598 kHz																								
	8906 kHz																								
	13306 kHz																								
	17946 kHz																								
<i>NAT Family B</i>		X																							
	2899 kHz																								
	5616 kHz																								
	8864 kHz																								
	13291 kHz																								
<i>NAT Family C</i>		X																							
	2872 kHz																								
	5649 kHz																								
	8879 kHz																								
	11336 kHz																								
<i>NAT Family D</i>		X																							
	2971 kHz																								
	4675 kHz																								
	8891 kHz																								
	11279 kHz																								
<i>NAT Family F</i>		X																							
	3476 kHz																								
	6622 kHz																								
	8831 kHz																								
Hours of Operation only as required																									

 European and North Atlantic Office	<h1>HF Management Guidance Material</h1>		
30/09/03	NATSPG	ACG	Page 41

---- END of Document ---

World Air Ops provides Airlines, Aircraft Operators, and Pilots around the World with Operational Support, Flight Planning, Ferry Flights, and Aircraft Deliveries.

You may be interested to view **other documents** in our Free Resource Library - organised by region:

North Atlantic	NAT
Africa	AFI
Europe	EUR
Pacific	PAC
South America	SAM
North America	NAM
Asia	ASI

Our Operations Room has live Airspace, Fuel, and Navigation information updates.
www.worldairops.com/opsroom.html

We provide:

- Route planning and analysis
- Computerised Flight Planning for Business Aviation, Airlines, Charter, Cargo and Military.
- Co-ordination of 3rd party Airport handling, Ground Support, Contract Fuel, Customs Delivery, Ferry, and Positioning Flights
- Charter Flights, Overflight permits, 'First Visit' kits and aerodrome reviews.
- Oceanic Flights, Organised Track Systems, International Procedures.

Visit our website for more: www.worldairops.com

Or email us your question - we're here to help : air.support@worldairops.com
15 minute response time.

